

A Strong Whirlpool Pump



HA350 Pump

A Strong Whirlpool Pump

- High performance
- Variable control
- Dry run protection
- Silent running
- Both pneumatic and electronic use



HA350, 0.55kW

ARTICLE NO.	POWER (P1)	V/HZ/A	PNEUMATIC (PRESENT FOR ELEC. USE)	FOR VARIABLE SPEED	SELF DRAIN	CENTER SUCTION (W/ DRAIN CONNECTION)
21-35321*	0.55kW/0.7HP	220-240V/ 50-60Hz/2.7A	X	X	X	

HA350, 0.68kW



ARTICLE NO.	POWER (P1)	V/HZ/A	PNEUMATIC (PRESENT FOR ELEC. USE)	FOR VARIABLE SPEED	SELF DRAIN	CENTER SUCTION (W/ DRAIN CONNECTION)
21-35421*	0.68kW/0.9HP	220-240V/ 50Hz/3.1A	X	X	X	
21-35221	0.68kW/0.9HP	220-240V/ 50Hz/3.1A	X	X		X

HA350, 0.68kW DRY RUN

ARTICLE NO.	POWER (P1)	V/HZ/A	PNEUMATIC ONLY	FOR VARIABLE SPEED	SELF DRAIN	DRY RUN PROTECTION
21-35421DRP	0.68kW/0.9HP	220-240V/ 50Hz/3.1A	X		X	X


* Available in bulk upon request 36-xxxxx. Replace Article No. 21 with 36 before ordering.

PerformanceCurve

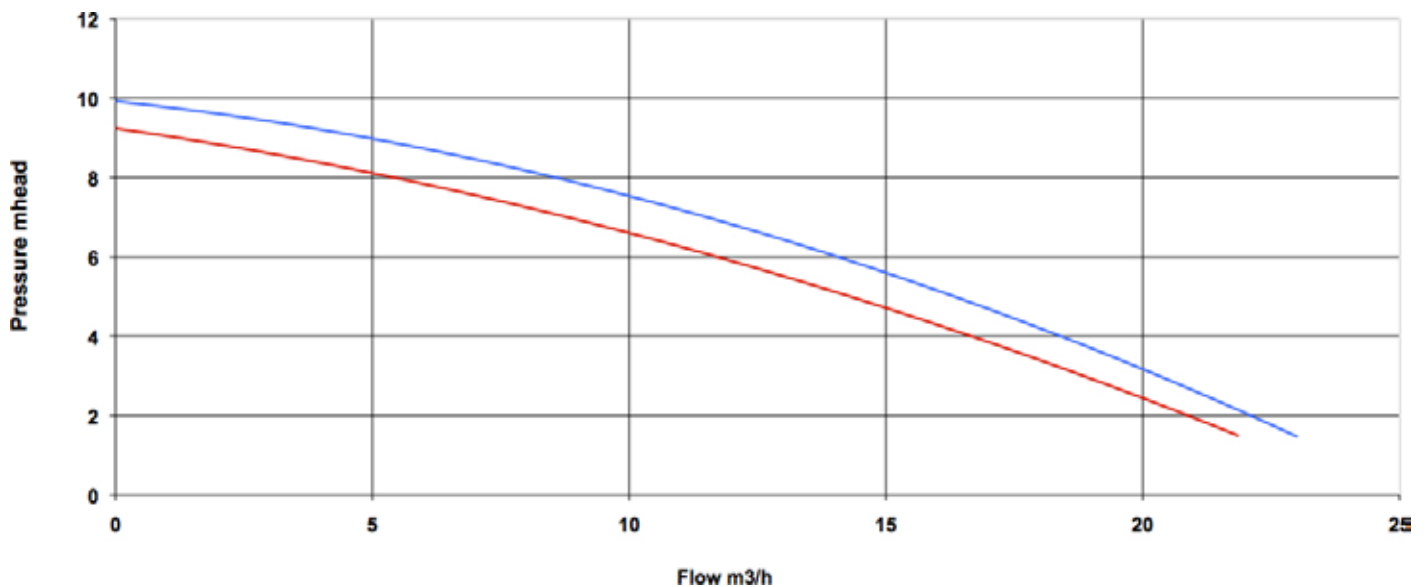


PumpDimensions

Self-drain

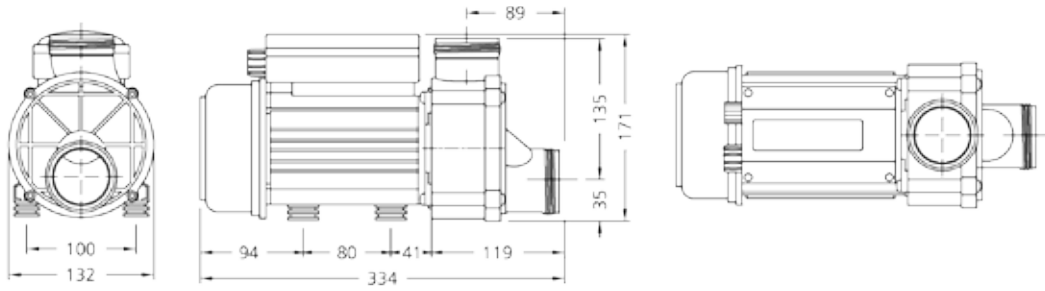

Centre suction

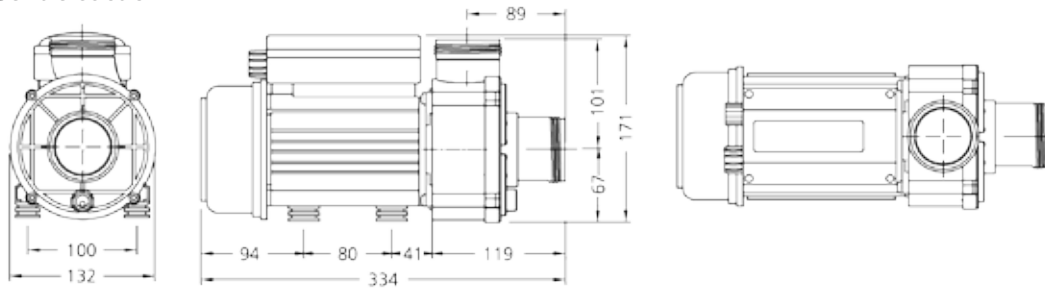

Dimensions in mm

ARTICLE NO.	DESCRIPTION
21-35x21(DRP)	HA 350 pump, 2.5" Buttress thread
20-0312 23-3649 21-3495-1	3 outlets. 1 variable and 2 on/off. Connection for 12V water level sensor. 230V/50Hz/10A Round touch: pump on/off, blower on/off, plus and minus Chromeplated brass escutcheon (use with double sticky tape 40-3496)
20-0313 25-26x3-11 23-3679 21-3495-1	3 outlets. 1 variable and 2 on/off. Connection for 12V water level sensor. 230V/50Hz/10A 2/3/4 function oval touch - OR Round touch: pump on/off, blower on/off, plus and minus Chromeplated brass escutcheon (use with double sticky tape 40-3496)
20-0314 25-2673-11	3 outlets. 1 variable and 2 on/off. Connection for 12V water level sensor. 230V/50Hz/10A 4 function oval touch: pump, blower, light and a universal symbol.
25-0211-12	12V water level sensor, black, incl. 2 m. cable

Touch 25-2673-11



Touch 23-3679 incl. escutcheon 21-3495-1



Buttress Thread (2.50")

O-Ring mounted on union

STANDARD GLUE CONNECTION

PUMP UNION, STRAIGHT

92015M 50 mm I.D.

2614022 1 1/2" I.D.



PUMP UNION WITH DISCHARGE TEE

92020M 2 X 32 mm I.D.

92020 2 x 1" I.D.

92030 2 x 26 mm O.D.



Other Accessories

STANDARD GLUE CONNECTION

Discharge Tee

20-0425 2 X 32 mm I.D. X 50 mm O.D.



FOR INSTALLATION

Mounting Plate

247012



Installation HA350



There are different ways of installing the pump

1. The easy accessible rubber feet allow quick installation of the pump, by screwing 4 pcs. of M6 bolts up into the nuts, that are integrated in the rubber feet.
2. Install the pump by adding the mounting plate (247012). The 10mm nut and pole makes installation of the pump easy on the pump stand.

HA350 0913

©2013 Balboa Water Group Inc. All rights reserved. Your Single Source Solution.
1382 Bell Avenue | Tustin, CA 92780 | p 714.384.0382 | f 714.384.0338
Specifications subject to change without notice. Patents Pending.

BALBOA
water group